



**PASCO Specialty & Mfg., Inc.**

P.O. Box 1667  
South Gate, CA 90280  
Phone (310) 537-7782  
Fax (800) 737-2726

7529 Perryman Court  
Curtis Bay, MD 21226  
Phone (410) 360-5010  
Fax (877) 377-6466

www.pascospecialty.com

**TECHNICAL SPECIFICATION SUBMITTAL**

Shielded couplings that allow transition pipe connection between different waste drain piping.

Job Name \_\_\_\_\_ Date \_\_\_\_\_

Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_

Customer/Wholesaler \_\_\_\_\_

Contractor \_\_\_\_\_

Architect/Engineer \_\_\_\_\_

**Engineering Specification: Stainless steel shielded neoprene couplings to allow transition between different drain waste piping. Connects cast iron, plastic, copper and tubular. Couplings are resistant to shear forces affecting piping.**

**Stainless Steel Shielded Transition Couplings  
designed for resistance to shear forces as well as corrosion.**

**58-CK SERIES**


CAST IRON, PLASTIC OR STEEL TO COPPER

PART NUMBER	CAST IRON, PLASTIC, STEEL	COPPER
58110CK	1-1/2"	1"
581125CK	1-1/2"	1-1/4"
58115CK	1-1/2"	1-1/2"
582125CK	2"	1-1/4"
58215CK	2"	1-1/2"
5822CK	2"	2"
58315CK	3"	1-1/2"
5832CK	3"	2"
5833CK	3"	3"
5843CK	4"	3"
5844CK	4"	4"

- **Complys:** ASTM C 1460
- **Gasket Material:** Neoprene - ASTM C 564
- **Shield Assembly Material Requirements:**  
All 300 Series Stainless Steel
- **Clamp**  
Band = 301 Stainless Steel .025 x .500 x Length  
Housing = 301 Stainless Steel  
Screw = 305 Stainless Steel 5/16" Hex - No Slot
- **Shield**  
301 Stainless Steel .02 x 2.125 x length
- **Eyelet**  
305 Stainless Steel

Note: Installation torque = 60" lbs.


- Maximum operating temperature: 168°F non-consistent
- Minimum operating temperature: -30°F



**58-CP SERIES**

CAST IRON TO PLASTIC, STEEL OR  
EXTRA-HEAVY CAST IRON

PART NUMBER	CAST IRON, PLASTIC, STEEL	COPPER
58150CP	1-1/2"	1-1/2"
58215CP	2"	1-1/2"
58200CP	2"	2"
5833CP	3"	3"
5843CP	4"	3"
5844CP	4"	4"
5855CP	5"	5"
5866CP	6"	6"
5888CP	8"	8"

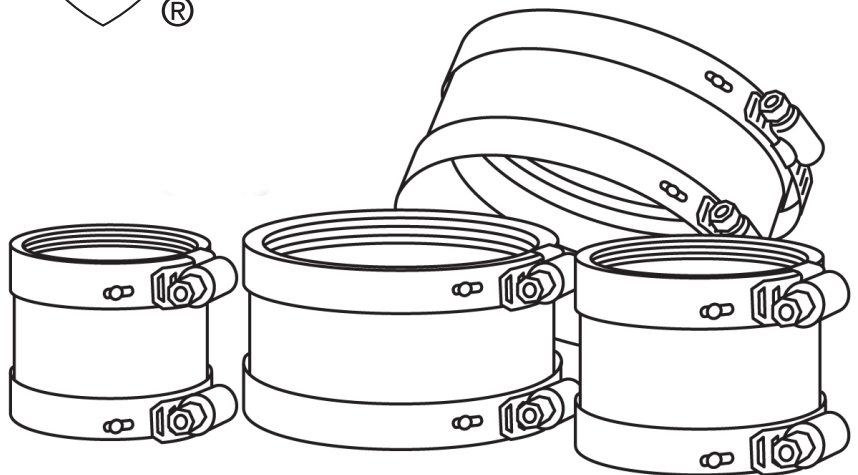

WARNING: Birth Defects, Reproductive Harm, and Cancer. www.p65warnings.ca.gov.